RHINO-RACK

Rhino Tie Down Strap Cam Buckle Cover (RTDP)

Important: Please read these instructions carefully prior to installation.
Please refer to your fitting instruction to ensure that the anchor strap is installed in the correct location.
Check the contents of kit before commencing fitment and report any discrepancies.
Place these instructions in the vehicle's glove box after installation is complete.

Layout

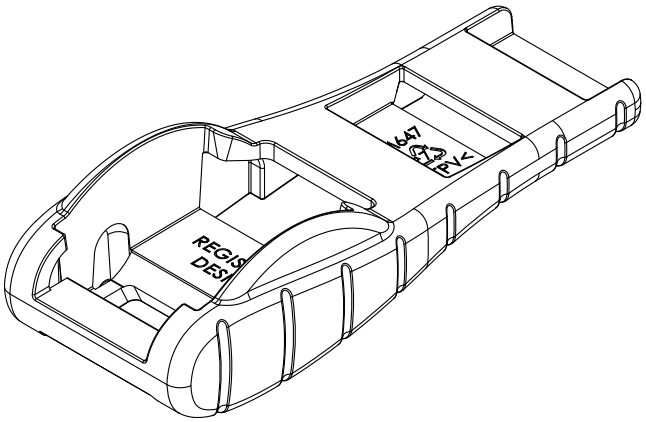

Parts List

Item	Component Name	Qty	Part No
1	Cam Buckle	2	M647
2	Fitting Instruction	1	R312

Care Instruction: Wash and clean vehicle roof racks prior to fitment

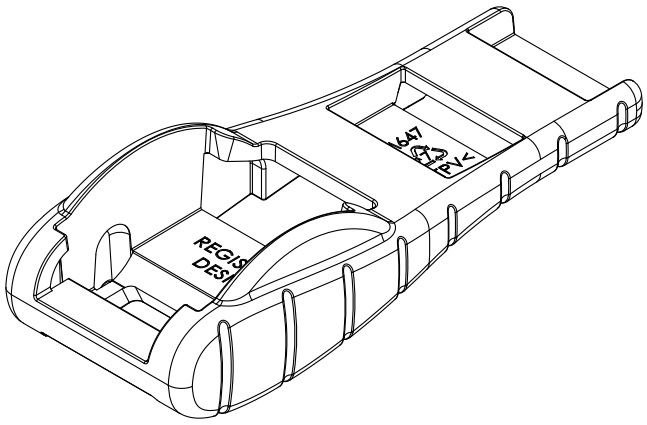

Warning:
It is important that all roof racks and accessories are installed and attached correctly. Failure to follow the correct attachments could result in an accident, serious injury or death to others. The driver of the vehicle is responsible for securing the roof racks and accessories, checking the attachments, periodically checking bolt torque and visual inspection of all components for wear and damage. Do not attempt to fit the roof rack system or accessory to your vehicle unless you fully understand these fitting instructions. Please direct any questions regarding fitting to the dealer or retailer from where they were purchased.

Use only non-stretch fastening ropes or straps.

Note for Dealers and Fitters
It is your responsibility to ensure this fitting instruction is given to the end user or client

Important Information

Rhino-Rack
3 Pike Street, Rydalmere,
NSW 2116, Australia.
(Ph) (02) 9638 4744 (Fax) (02) 9638 4822

Document No: R312
Prepared By: Andy Wana
Authorised By: Chris Murty

Issue No: 01
Issue Date: 1/8/2013

These instructions remain the property of Rhino-Rack Australia Pty Ltd and may not be used or changed for any other purpose than intended.

Rhino Tie Down Strap Cam Buckle Cover (RTDP)

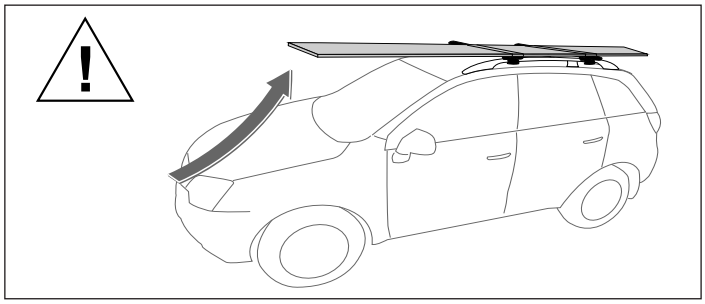

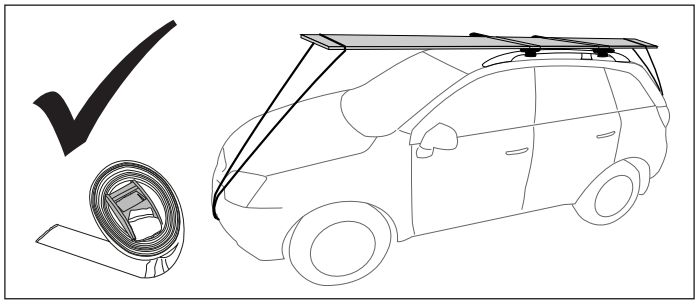

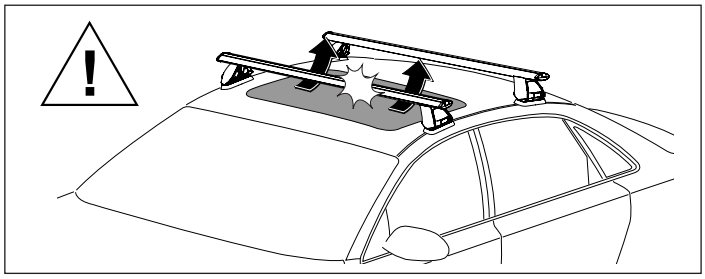

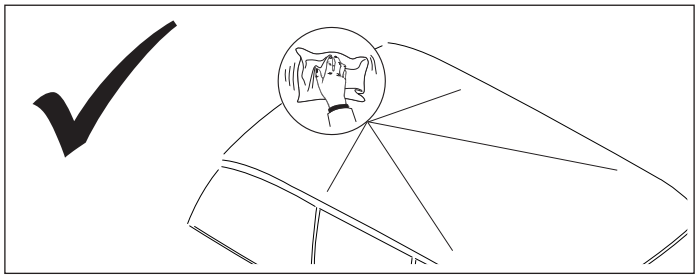

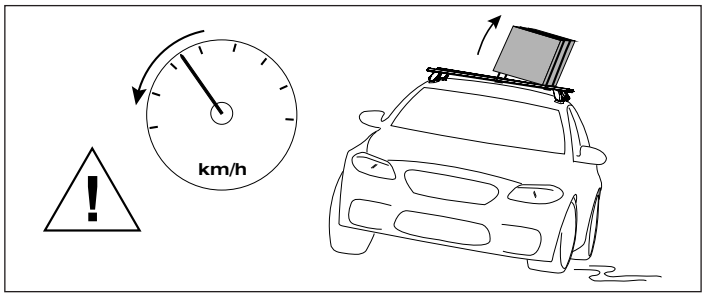

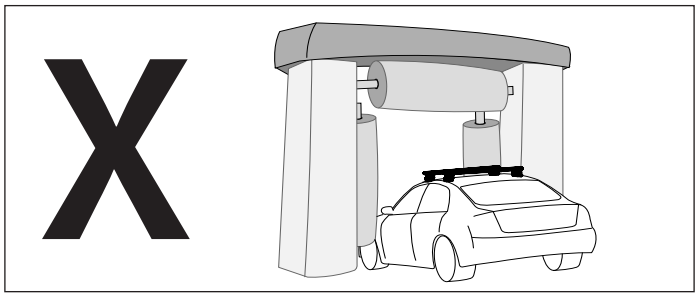

2 x Crossbars = 5.0kg

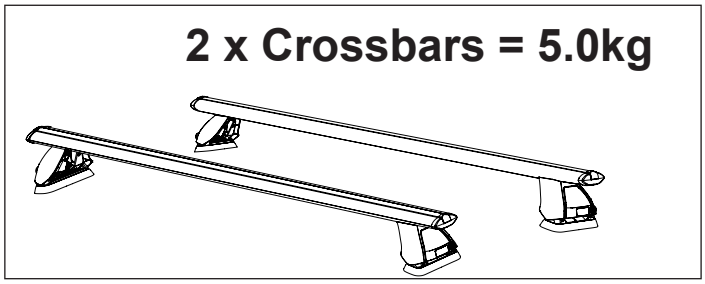

? kg

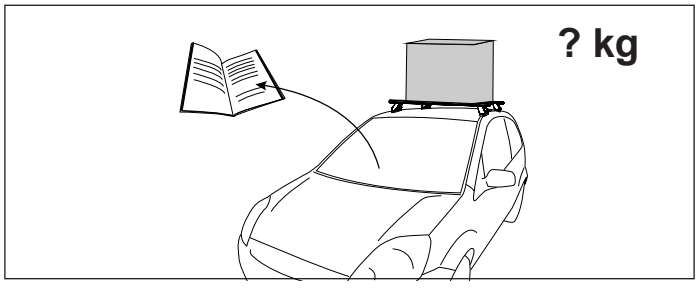

When these roof racks are to be used on a vehicle that is driven off sealed roads, the manufacturer maximum roof load rating (to be found in the vehicles User Manual) should be ***halved***. Do not forget to subtract 7.5kg from your maximum carrying capacity due to the weight of the crossbars and legs.



60kg load rating (Urban road) = ***30kg load rating*** (Off road - 60kg / 2)



WARNING! Important Load Carrying Instructions

With utility vehicles, the cabin and the canopy move independently. Roofracks and vehicle can be damaged if the item transported is rigidly fixed at points on both the cabin and canopy. Instead, rigidly fix to either the cabin roofracks or the canopy roofracks.

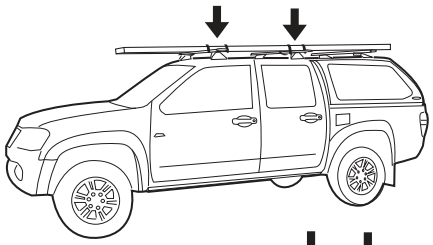

YES

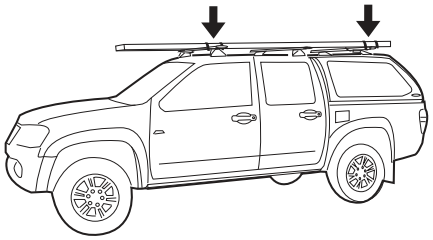

NO

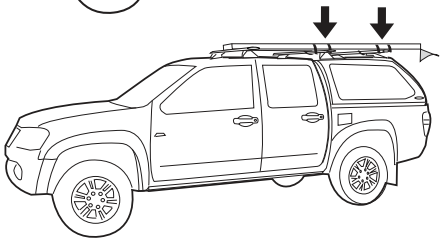

YES

Rhino Tie Down Strap Cam Buckle Cover (RTDP)

Fitting instructions

1

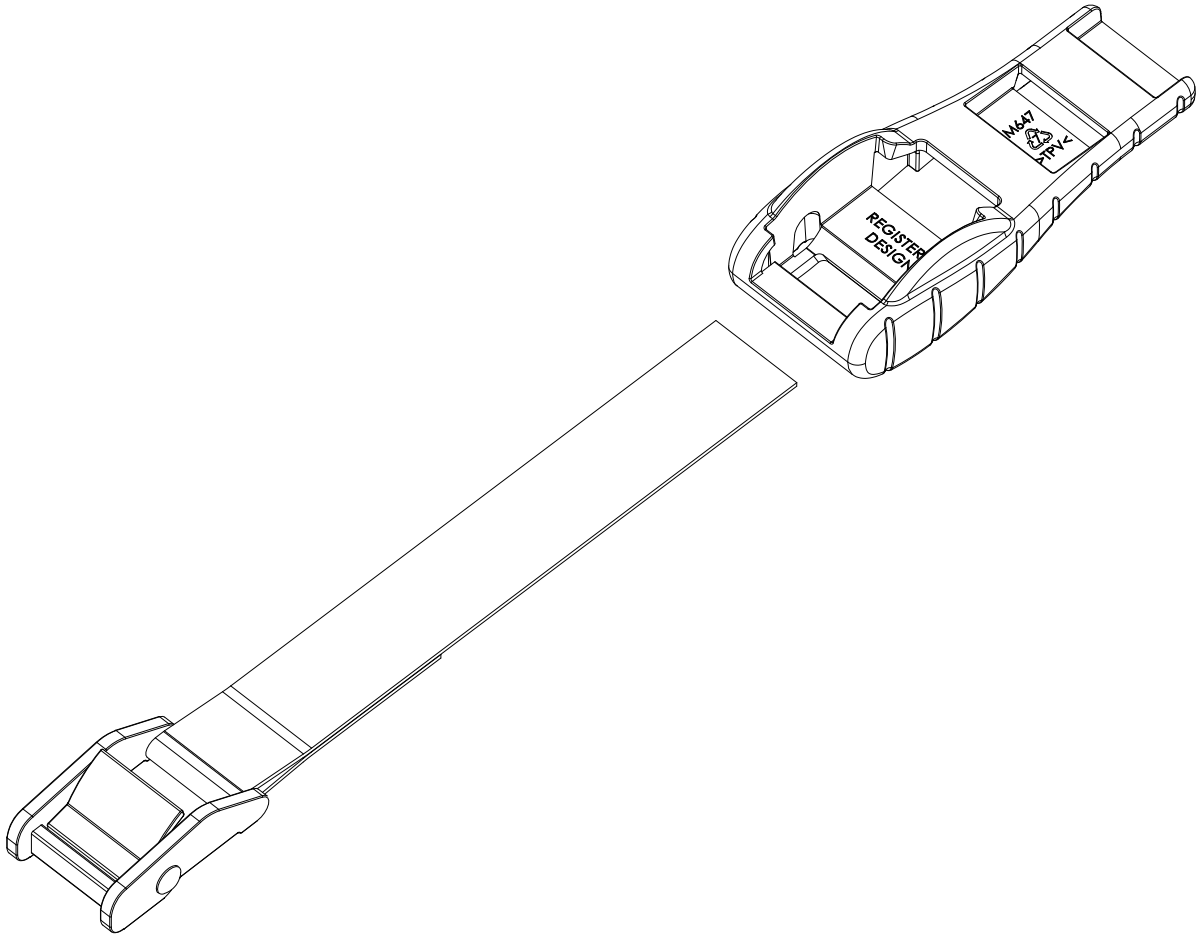

2

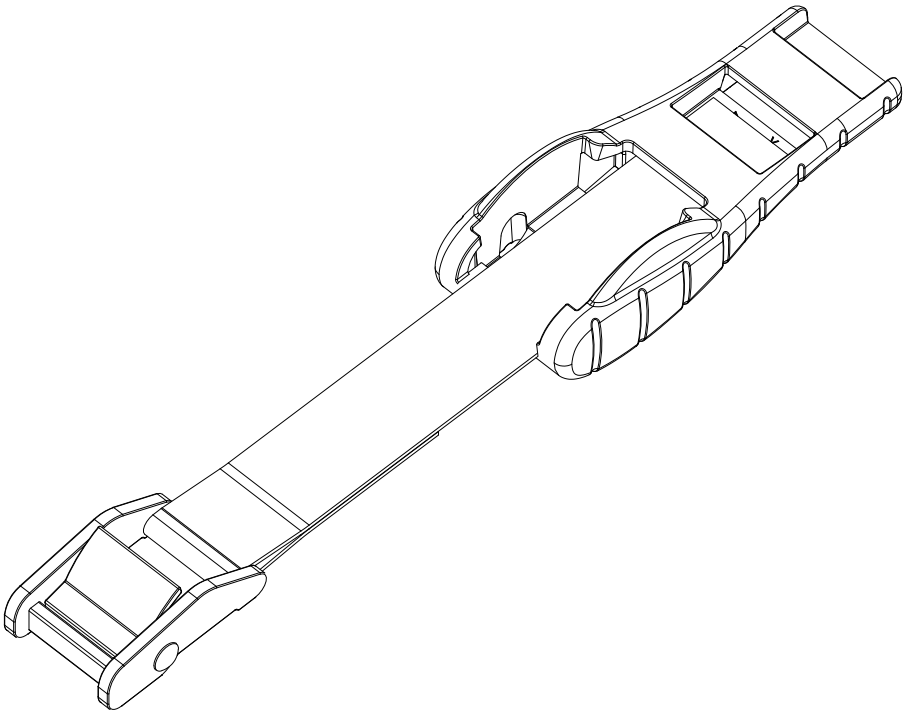

Rhino Tie Down Strap Cam Buckle Cover (RTDP)

3

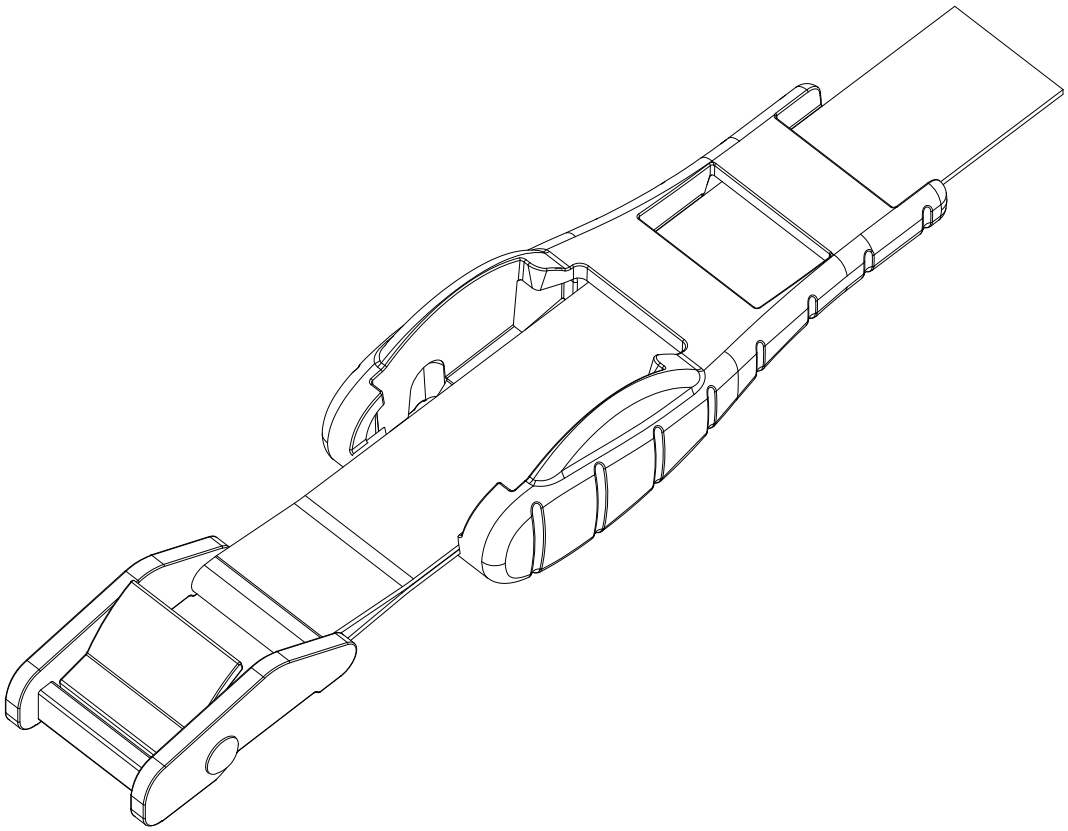

4